
## **Model PRESTIGE**





## Description

A high-quality product sold in roll format, in five timeless colours, for all critical areas that are prone to soiling.

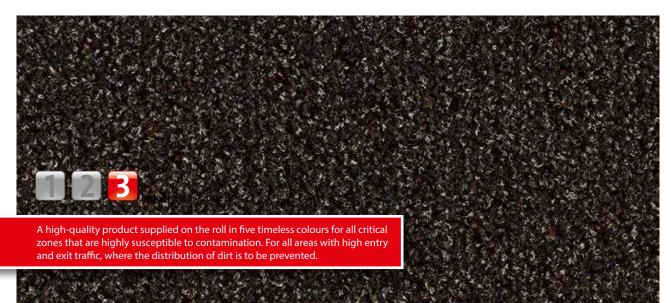











Anti-static Castor-resistant

Suitable for stairs

Luxurious

DS (EN 13893) Resistant strength



Cfl-s1









Highly suitable for property





## **Model PRESTIGE**

Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide ECONYL
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	975
Total weight (g/m²)	3.560
Overall height (mm)	8
Tuft density/m <sup>2</sup>	141.730
Slip resistance	DS (EN 13893)
Certificates	CE conformity EN 14041 (rolls only)
Supplied as rolls	130 cm wide (incl. border) 200 cm wide (incl. border)
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.

Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco
Suitable for:	
Residential and care homes	
Arena	
medical practice	
Train station	
Offices and administrative buildings	
Family home	
University / Higher education institution	
airport	
Hotel	
Kindergarten/Nursery	
Clinic/Hospital	
Apartment building	
Trade fair	
School	
Sports hall	



## **Model PRESTIGE**

Colours



61.01 anthracite




61.03 brown



61.06 beige



61.02 grey



61.05 blue

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) · Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de · www.emco-bau.com

